

K3G310-RR05-H2

## EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket



### Nominal data

Type	K3G310-RR05-H2	
Motor	M3G084-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed	min <sup>-1</sup>	2360
Power consumption	W	500
Current draw	A	2.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

### Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	66.2	48.4	09 Power consumption $P_{ed}$	kW	0.51
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	2400
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	462
04 Efficiency grade N		79.8	62	10 Speed n	min <sup>-1</sup>	2360
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-151718

K3G310-RR05-H2

## EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket

### Technical description

Weight	9.5 kg
Fan size	310 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	Sheet steel, galvanized
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F3-1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"><li>- Output 10 VDC, max. 10 mA</li><li>- Operation and alarm display</li><li>- Alarm relay</li><li>- Integrated PID controller</li><li>- Power limiter</li><li>- Motor current limitation</li><li>- PFC, active</li><li>- RS-485 MODBUS-RTU</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li><li>- Control interface with SELV potential safely disconnected from supply</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage / phase failure detection</li></ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (if protective earth is connected by customer to the housing's connection point)
Conformity with standards	EN 61800-5-1; EN 60335-1; CE
Approval	CCC; C22.2 No.77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730


K3G310-RR05-H2

## EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket

### Product drawing

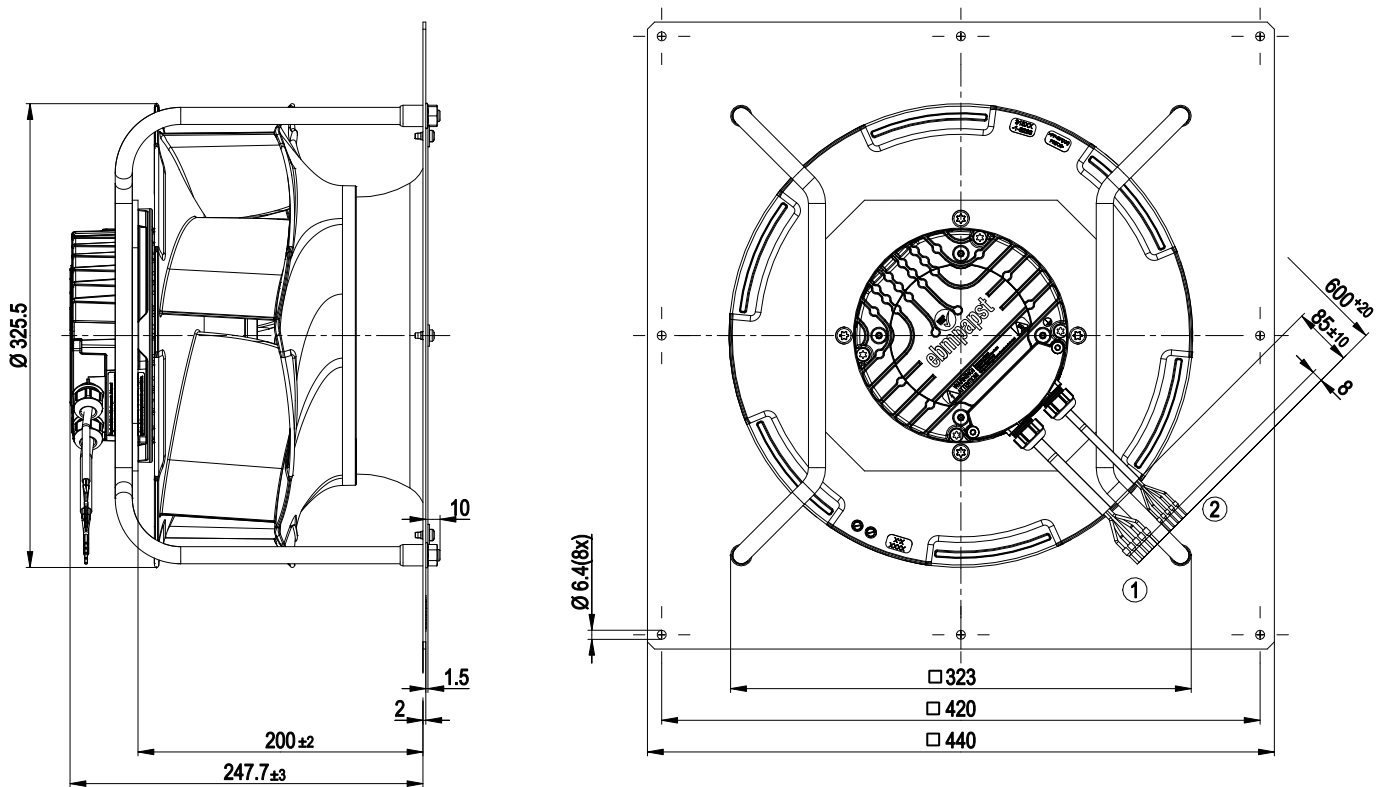


- |   |                                      |
|---|--------------------------------------|
| 1 | Cable PVC AWG18, 5x crimped ferrules |
| 2 | Cable PVC AWG22, 5x crimped ferrules |

# EC centrifugal module - RadiCal


backward-curved, single-intake  
with support bracket

## Connection diagram

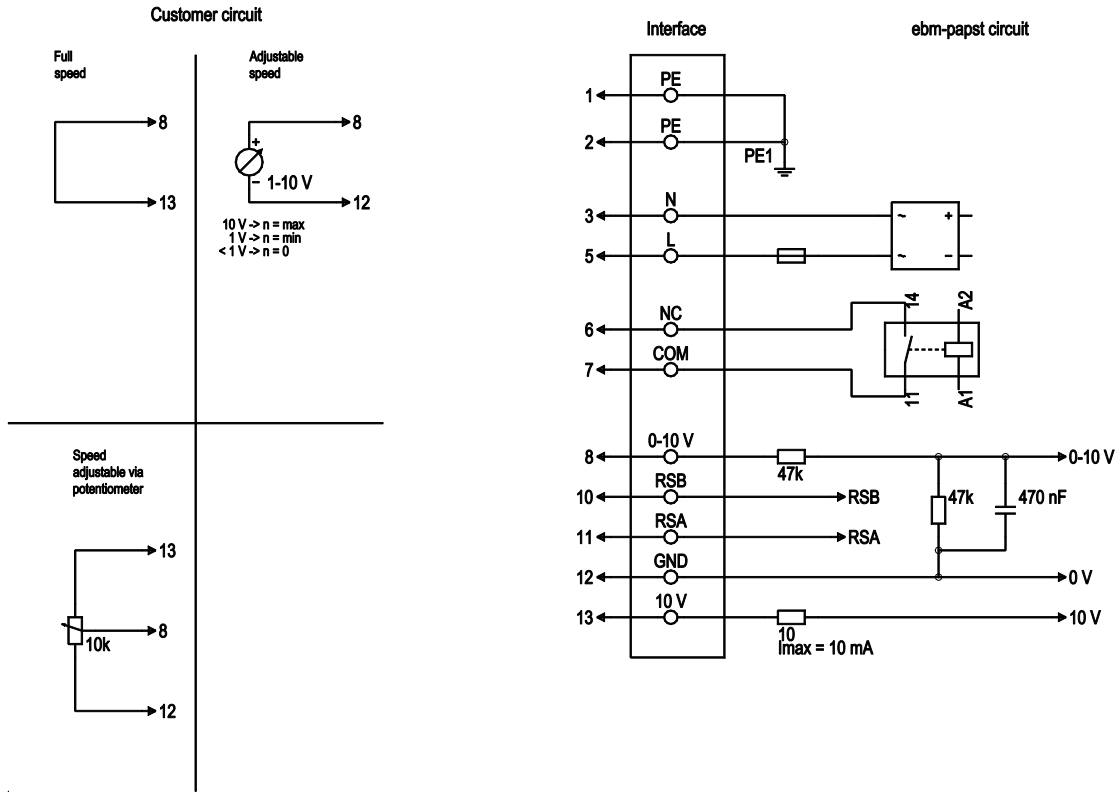

No.	Conn.	Designation	Color	Function/assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	N	blue	Power supply, neutral conductor, 50/60 Hz
1	5	L	black	Power supply, phase, 50/60 Hz
1	6	NC	white 1	Status relay, floating status contact; break for failure, contact rating 250 VAC / 2A (AC1) / min. 10 mA, basic insulation on supply side and reinforced insulation on control interface side
1	7	COM	white 2	Status relay, floating status contact; common connection, contact rating 250 VAC / 2A (AC1) / min. 10 mA, basic insulation on supply side and reinforced insulation on control interface side
2	8	0-10V	yellow	Analog input (set value); 0-10 V; $R_i = 100 \text{ k}\Omega$ ; adjustable curve
2	10	RSB	brown	RS485 interface for MODBUS, RSB
2	11	RSA	white	RS485 interface for MODBUS, RSA
2	12	GND	blue	Reference ground for control interface, SELV
2	13	+10V	red	Fixed voltage output 10 VDC, +10 V $\pm 3\%$ ; max. 10 mA; short-circuit-proof; power supply for external devices (e.g. pot)

## Curves: Air performance 50 Hz

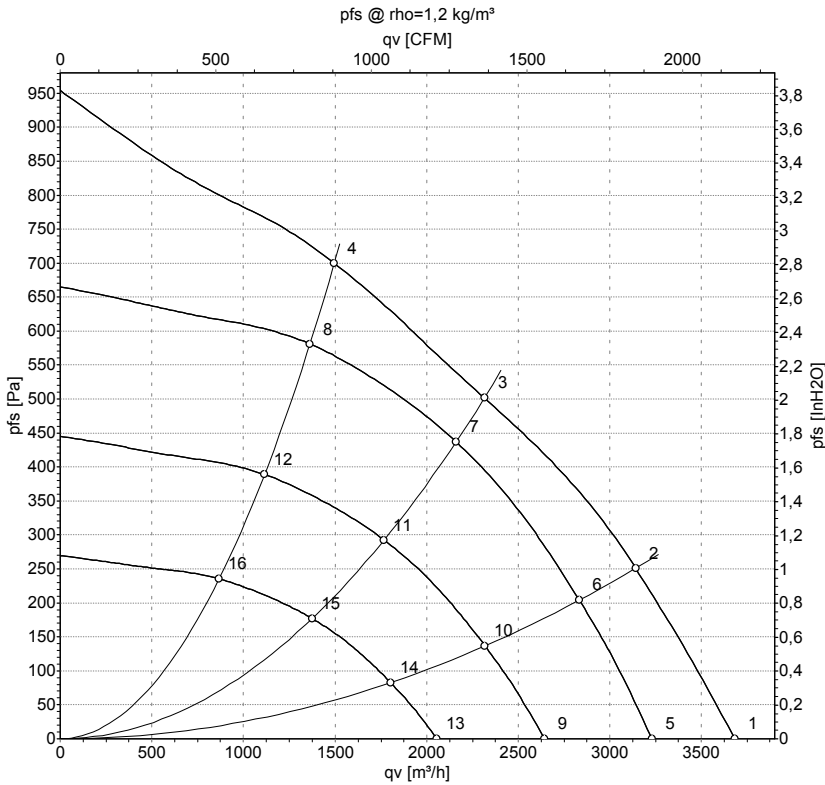

Measurement: LU-151718-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	qv	p <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa
1	230	50	2510	430	1.88	74	81	3680	0
2	230	50	2440	500	2.20	69	76	3140	250
3	230	50	2360	500	2.20	65	72	2315	500
4	230	50	2410	500	2.20	70	77	1495	700
5	230	50	2200	291	1.27	71	78	3230	0
6	230	50	2200	373	1.62	67	74	2835	204
7	230	50	2200	420	1.83	63	70	2160	437
8	230	50	2200	393	1.71	67	75	1365	583
9	230	50	1800	159	0.70	66	73	2645	0
10	230	50	1800	204	0.89	62	69	2320	137
11	230	50	1800	230	1.00	58	65	1770	293
12	230	50	1800	215	0.94	62	70	1115	391
13	230	50	1400	75	0.33	59	67	2055	0
14	230	50	1400	96	0.42	55	63	1805	83
15	230	50	1400	108	0.47	52	59	1375	177
16	230	50	1400	101	0.44	56	63	870	236

U = Power supply · f = Frequency · n = Speed · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 qv = Air flow · p<sub>fs</sub> = Pressure increase